

strapex

Hand Tools for Steel Strapping




Manual tensioning
and sealing



Pneumatic tensioning
and sealing

The Strapex Advantage

Hand Tools, Strap and After-Sales Service as a total package

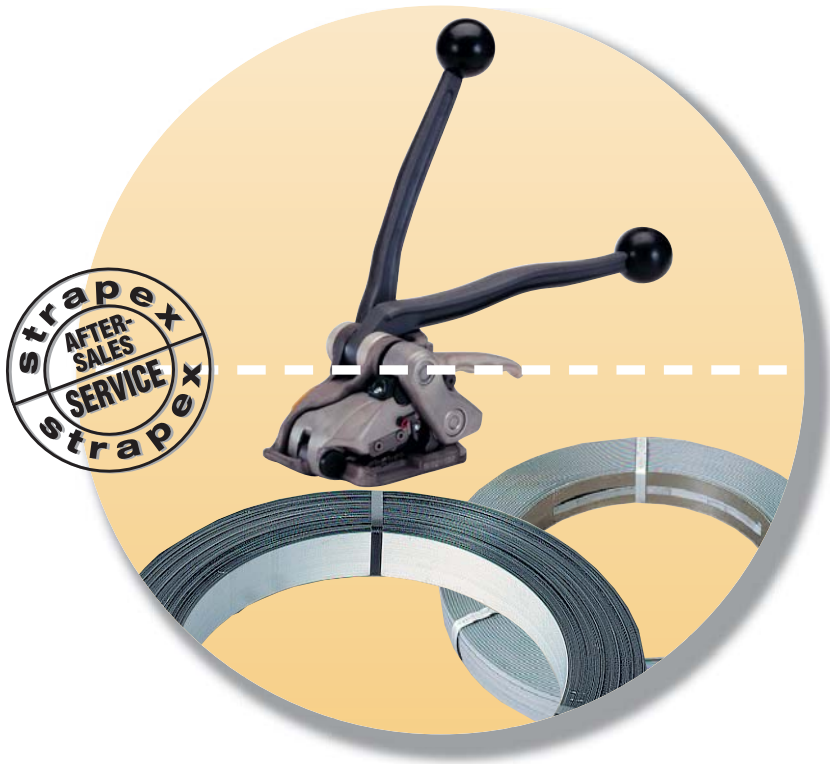

The right tool

The applications for manual strapping are varied – just like the Strapex range. You can choose one of several systems: manual or pneumatic tensioning and sealing, sealless or with seal.

The right strap

A comprehensive range of steel straps each with their own characteristics to ensure that strap and tool are always the best possible combination.

Worldwide Sales and Service

You will receive expert advice on choosing the right solution and service package together with the guaranteed availability of spare parts.

Additional Products for the Transport Securing Sector

Hand tools and machines for plastic strapping


Pallet stretch-wrapping machines



For flat packages

Manual, sealless tools

for mobile applications



Model STM 60

The economical manual solution:
Easy, lightweight, fast

Weight only 3,5 kg
(7.7 lbs)

Fast and easy strap
inserting

Effortless tensioning and
sealing

Ergonomic design

Flexible use: Medium to
heavy packages of varying
types and sizes

Maintenance-friendly:
Few wear parts – easily
maintained at site



Model STM 61

For heavy duty applications

For steel straps 19 mm
(³/₄") wide and up to
0.80 mm (.031") thick



Technical data		STM 60	STM 61
Article number, with steel strap			
13 x 0.63 (0.58*) mm, (¹ / ₂ x .025 (.023*)"		460.513.001	
16 x 0.63 (0.58*) mm, (³ / ₈ x .025 (.023*)"		460.516.001	
19 x 0.63 (0.58*) mm, (³ / ₄ x .025 (.023*)"		460.519.001	
19 x 0.80 (0.80*) mm, (³ / ₄ x .031 (.031*)"			460.519.011
Weight		3.5 kg (7.7 lbs)	5.1 kg (11.2 lbs)
Dimensions	Length	370 mm (14.50")	450 mm (17.68")
	Width	185 mm (7.27")	130 mm (5.11")
	Height	122 mm (4.79")	135 mm (5.30")
Tensioning force, up to approx.		6500 N	6000 N
Steel strap			
Quality 850 N/mm ² , up to		19 x 0.63 mm (³ / ₄ x .025")	19 x 0.80 mm (³ / ₄ x .031")
1100 N/mm ² , up to		19 x 0.63 mm (³ / ₄ x .023")	19 x 0.80 mm (³ / ₄ x .031")

* High tensile quality, up to 1100 N/mm²

For flat packages

Pneumatic, sealless tools for stationary applications

Model STP 62

Ideal for industrial applications with steel strap 13–16 mm ($\frac{1}{2}$ – $\frac{5}{8}$ ") wide

Control buttons positioned conveniently above the handle

Tensioning force up to 4000 N



Model STP 63

Compact and light for its performance class with steel strap 16–19 mm ($\frac{5}{8}$ – $\frac{3}{4}$ ") wide"

Control buttons positioned conveniently above the handle

With swivelling suspension bow

For heavy duty applications

Tensioning force up to




Technical data		STP 62	STP 63
Article number, with steel strap			
13 x 0.60 (0.50*) mm, $\frac{1}{2}$ x .023 (.020*)"		465.513.001	
16 x 0.60 (0.50*) mm, $\frac{5}{8}$ x .023 (.020*)"		465.516.001	
16 x 0.80 (0.63*) mm, $\frac{5}{8}$ x .031 (.025*)"			465.516.011
19 x 0.80 (0.63*) mm, $\frac{3}{4}$ x .031 (.025*)"			465.519.001
Weight		9.7 kg (20 lbs)	11.5 kg (24 lbs)
Dimensions	Length	310 mm (12.18")	400 mm (15.72")
	Width	105 mm (4.12")	120 mm (4.71")
	Height	240 mm (9.43")	310 mm (12.18")
Tensioning force, up to approx.		4000 N	6500 N
Compressed air consumption (6 bar)			
– Tensioning		6 NI/s	6.4 NI/s
– Sealing		6 NI	12 NI
Steel strap			
Quality 850 N/mm ² , up to		16 x 0.60 mm	19 x 0.80 mm
		($\frac{5}{8}$ x .023")	($\frac{3}{4}$ x .031")
1100 N/mm ² , up to		16 x 0.50 mm	19 x 0.63 mm
		($\frac{5}{8}$ x .020")	($\frac{3}{4}$ x .025")

* High tensile quality, up to 1100 N/mm²

For round and small packages

Pneumatic tools for stationary/mobile applications

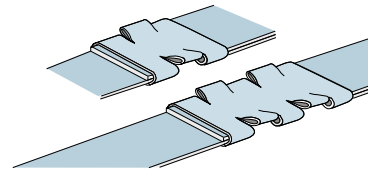

Model STR 64

The lightweight tool for mobile, stationary applications

Weight only 3.2 kg (7 lbs)

Tensioning force up to 3000 N

With air connection
 – on top: for strapping applications with suspended hook or
 – at rear: for strapping applications without suspension hook



Model STR 65

The handy tool for heavy duty, stationary applications

Tensioning force up to 7000 N

Model STR 66

The high performance tool for heavy duty, stationary applications

Tensioning force up to 8400 N



Technical data		STR 64	STR 65	STR 66
Article number, with steel strap				
13 x 0.63 (0.63*) mm, 1/2 x .025 (.025*)"		466.013.001**		
		466.013.011***		
16 x 0.63 (0.63*) mm, 5/8 x .025 (.025*)"		466.016.001**		
		466.016.011***		
19 x 0.63 (0.63*) mm, 3/4 x .025 (.025*)"		466.019.001**		
		466.019.011***		
19 x 0.80 (0.80*) mm, 3/4 x .031 (.031*)"			466.019.201	
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"				466.025.201
32 x 0.80 (0.80*) mm, 1 1/4 x .031 (.031*)"				466.032.201
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"				466.032.211
Weight		3.2 kg (7 lbs)	7.6 kg (16.6 lbs)	9.3 kg (20.4 lbs)
Dimensions	Length	302 mm (11.87")	420 mm (16.50")	470 mm (18.47")
	Width	130 mm (5.11")	160 mm (6.29")	170 mm (6.68")
	Height	180 mm (7.07")	300 mm (11.79")	300 mm (11.79")
Tensioning, up to approx.		3000 N	7000 N	8400 N
Seal notches (reverse)		1	2	2
Compressed air consumption (6 bar)				
– Tensioning		4 NI/s	6.4 NI/s	6.4 NI/s
– Sealing		3.4 NI	12 NI	14 NI

Steel strap

Quality	850 N/mm ² , up to	19 x 0.63 mm (3/4 x .025")	19 x 0.80 mm (3/4 x .031")	32 x 1.00 mm (1 1/4 x .040")
	1100 N/mm ² , up to	19 x 0.63 mm (3/4 x .025")	19 x 0.80 mm (3/4 x .031")	32 x 0.80 mm (1 1/4 x .031")



Matching seals

Article number, with steel strap				
13 x 0.63 (0.63*) mm, 1/2 x .025 (.025*)"		480.013.022		
16 x 0.63 (0.63*) mm, 5/8 x .025 (.025*)"		480.016.022		
19 x 0.63 (0.63*) mm, 3/4 x .025 (.025*)"		480.019.022		
19 x 0.80 (0.80*) mm, 3/4 x .031 (.031*)"			480.019.045	
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"				480.025.045
32 x 0.80 (0.80*) mm, 1 1/4 x .031 (.031*)"				480.032.045
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"				480.032.045

* High tensile quality, up to 1100 N/mm²

** Air connection on top

*** Air connection at rear



For round and small packages

Pneumatic tools for mobile applications

Tensioner/Sealer combination

The lightweight tools for heavy duty, mobile applications

For steel strap up to 32 mm (1 1/4") wide and up to 1 mm (.040") thick

Tensioning force up to 8400 N



Tensioner STR 67



Sealer STR 68

For single reverse notch



Sealer STR 69

For double reverse notches



Technical data	STR 67	STR 68	STR 69
Article number, with steel strap			
19–32 x 1.00 (1.00*) mm,			
3/4–1 1/4 x .040 (.040*)"	466.032.501		
19 x 1.00 (0.80*) mm, 3/4 x .040 (.031*)"		466.119.601	466.219.601
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"		466.125.601	466.225.601
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"		466.132.601	466.232.601
Weight	4.1 kg (9 lbs)	2.8 kg (6.1 lbs)	4.7 kg (10.2 lbs)
Dimensions			
Length	340 mm (13.36")	300 mm (11.79")	350 mm (13.75")
Width	110 mm (4.32")	130 mm (5.11")	170 mm (6.68")
Height	110 mm (4.32")	210 mm (8.25")	230 mm (9.04")
Tensioning, up to approx.	8400 N		
Seal notches (reverse)		1	2
Compressed air consumption (6 bar)			
– Tensioning	6.4 NI/s		
– Sealing		3 NI	6.4 NI


Steel strap

Quality	850 N/mm ² , up to	32 x 1.00 mm	32 x 1.00 mm	32 x 1.00 mm
		(1 1/4 x .040")	(1 1/4 x .040")	(1 1/4 x .040")
	1100 N/mm ² , up to	32 x 1.00 mm	32 x 0.80 mm	32 x 0.80 mm
		(1 1/4 x .040")	(1 1/4 x .031")	(1 1/4 x .031")

Matching seals

Article number, with steel strap			
19 x 1.00 (0.80*) mm, 3/4 x .040 (.031*)"		480.019.045/.022	480.019.045
25 x 1.00 (0.80*) mm, 1 x .040 (.031*)"		480.025.045/.022	480.025.045
32 x 1.00 (0.80*) mm, 1 1/4 x .040 (.031*)"		480.032.045/.022	480.032.045

* High tensile quality, up to 1100 N/mm²



Accessories to hand tools

Strap dispensers and strap cutters



Model STA 76 for oscillating wound steel strap

The mobile dispenser

Trolley type

With stable steel tube frame, large rubber wheels, coil brake and tray for tools, seals and strap cutters



Dispenser for steel strap

Model	Article number	Strap width	Inside Ø	Outside Ø
STA 76	461.119.001	10–19 mm ($\frac{3}{8}$ – $\frac{3}{4}$ ")	405 mm (16")	600 mm ($23\frac{5}{8}$ ")
STA 77	461.219.001	10–19 mm ($\frac{3}{8}$ – $\frac{3}{4}$ ")	405 mm (16")	600 mm ($23\frac{5}{8}$ ")



Model STA 77 The stationary dispenser for oscillating wound steel strap

Horizontal position

Model STA 78



Model STA 79



Strap cutters

Model	Article number	Strap width	Lever length
STA 78	461.019.001	10–19 mm ($\frac{3}{8}$ – $\frac{3}{4}$ ")	160 mm ($6\frac{3}{8}$ ")
STA 79	461.031.001	19–32 mm ($\frac{3}{4}$ – $1\frac{1}{4}$ ")	355 mm (14")

Strapex worldwide




- Own development and production
 - Hand tools
 - Machines/Installations
 - Strap

- Own sales and service organisations

- Independent sales and service partners worldwide

Strapex advantage

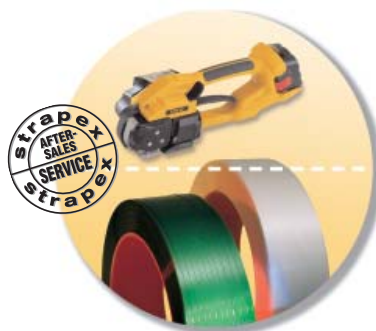

Hand tools, strap and after-sales service as a total package

Australia

IWD Strapping Sales Pty Ltd.
AU-Melbourne VIC 3001
Phone +1 800 779 380
sales@iwdstrapping.com.au

Austria

Strapex GmbH
AT-3500 Krems
Phone +43 2732 73 501
sales@strapex.at

Belgium

Strapex Sprl
BE-1480 Saintes
Phone +32 2 367 10 70
sales@strapex.be

Brasil

Syspack Ind. Com. de Sistemas
de Emb. Ind. Ltda
BR-Jundiai - São Paulo 13213-090
Phone +55 11 3395-0600
mpadovesi@syspack.com.br

Denmark

ApS Strapex
DK-2740 Skovlunde
Phone +45 44 85 06 00
sales@strapex.dk

Finland

Strapex / Oy Josef Kihlberg Ab
FI-15230 Lahti
Phone +358 388 08 80
reception.oy@kihlberg.fi

France

Strapex S.A.S.
FR-94204 Ivry-sur-Seine
Phone +33 1 49 87 01 60
sales@strapex.fr

Germany

Strapex GmbH
DE-71088 Holzgerlingen
Phone +49 7031 68 04 0
info@strapex.de

Holland

Strapex Nederland BV
NL-3542 DK Utrecht
Phone +31 30 248 03 11
sales@strapex.nl

India

Strapex India Limited
IN-Mumbai 400 059
Phone +91 22-6640 0204/0205
info@strapex.co.in

Italy

Strapex S.r.l.
IT-20013 Magenta (Milano)
Phone +39 02 97 00 751
sales@strapex.it

Mexico

Flejes Misa
MEX-Apodaca, N.L. CP 66610
Phone +52 (81) 81 58 78 00
ventas@flejesmisa.com.mx

Norway

Strapex / Josef Kihlberg AS
NO-7448 Trondheim
Phone +47 7382 06 00
reception.as@kihlberg.no

Poland

Transaco Group Sp. z o.o.
PL-58-200 Dzierżonów
Phone +48 74 833 50 02
transaco@transaco.pl

Portugal

Strapex Embalagem Lda
PT-2794-051 Carnaxide
Phone +351 21 416 47 80
sales@strapex.pt

Russia

Roxor Industry
RU-199178 St Petersburg
Phone +7 800 555 7850
info@roxor.ru

Singapore

Syspex Singapore Pte Ltd
SG-Singapore 637848
Phone +65 6863 9119
syspex@singnet.com.sg

Spain

Band Automat, S.A.
ES-08520 Les Franqueses del Valles
(Barcelona)
Phone +34 93 849 63 33
band@bandautomat.com

Sweden

Strapex / Josef Kihlberg AB
SE-544 22 Hjo
Phone +46 503 328 00
reception@kihlberg.se

Switzerland

Strapex GmbH
CH-5610 Wohlen
Phone +41 56 619 80 80
info@strapex.ch

United Kingdom

Strapex
GB-Aldridge, Walsall, WS9 8UQ
Phone +44 1922 742 500
info@strapex.co.uk

USA

Acme
USA-Elmhurst, IL 60126
Phone 630-589-5100
info@acme-ds.com

All other countries

Strapex Partners
c/o ORGAPACK GmbH
Packaging Technology
CH-8953 Dietikon (Switzerland)
Phone +41 44 745 50 50
partners@strapex.com

MEMBER OF
ORGAPACK STRAPEX GROUP

www.strapex.com