

Wicket doors and side doors for quick, convenient access



Wicket doors do not require any additional space.




Concealed hinges as standard on the ST 500, optional on the ET 500. //NEW

Wicket door


The ET 500 and ST 500 collective garage doors are available with a wicket door on request.

- Left, right or centre fitting possible
- Clear passage width at least 900 mm
- Clear passage height of wicket door:
for ET 500, BRH -195 mm;
for ST 500, BRH -210 mm
- Overhead door closer as standard
- ET 500: optional concealed hinges
- ST 500: concealed hinges as standard, without external lever handle


Vertical view
Up-and-over door ET 500 with wicket door

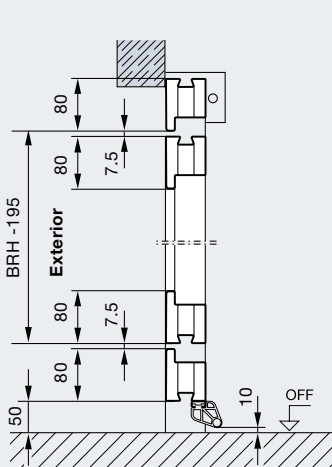


Vertical view
Sliding door ST 500 with wicket door

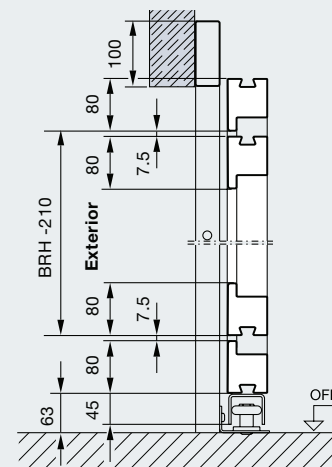

Horizontal view
Up-and-over door ET 500 with wicket door

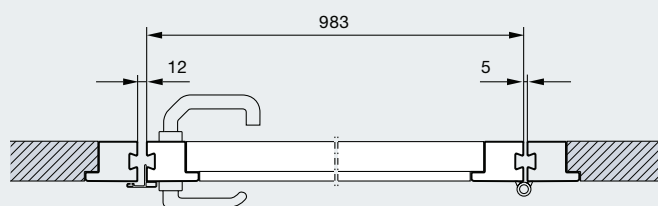

Horizontal view
Sliding door ST 500 with wicket door

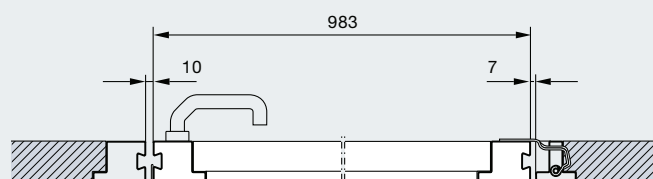

BRB = Nominal size width
BRH = Nominal size height
LDB = Clear passage width
RAM = Overall frame dimension




With black plastic lever handle set as standard




Hörmann side doors always match the door design.

Vertical view
Example: fitting behind the opening

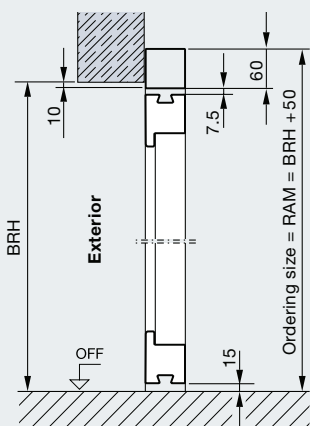

Vertical view
Example: fitting in the opening

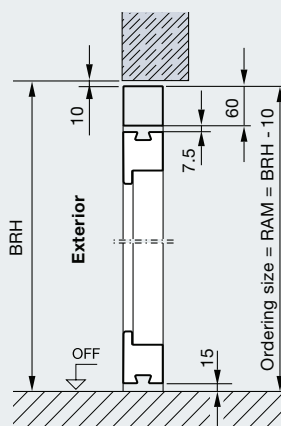


Side door

Matching side doors are available as an option for ET 500 and ST 500.

- Matching the respective design
- Max. clear passage width 1363 mm (reduced if the opening angle is less than 180°)
- Max. clear passage height 2440 mm
- With lever/lever, prepared for profile cylinder, black plastic as standard

Horizontal view
Fitting behind the opening

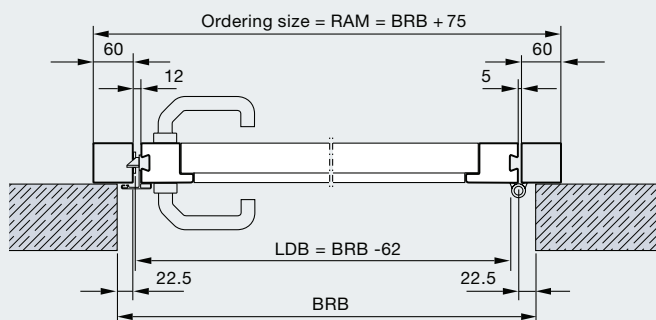

Horizontal view
Fitting in the opening

