

Steel doors for on-site infill




Style 905

Door width up to 5000 mm
Wicket door and side door
also available

A solid basis

- Very stable frame construction with reinforced struts. Fully welded!
- Fully galvanized, leaf frame additionally with a high-quality polyester primer powder coating in Terra brown (similar to RAL 8028).
- Frames and struts are pre-drilled every 30 mm.
- Illustrated instructions with style suggestions.

This door construction offers two design options:

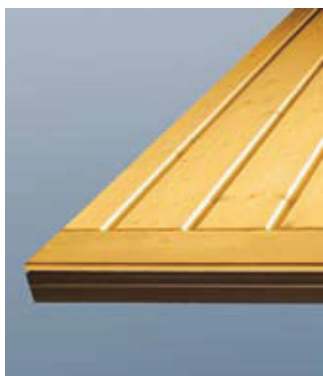

Infill overlapping the frame, where the frame and bottom section are fully covered.



Infill in the frame with a visible bottom section to protect against spray water.



With style 905, door widths of up to 5 m are possible if the permissible infill weight is complied with. See also page 25.