



Fire Door fire-retardant



tested to BS 476 part 22:1987
approved to LPS 1056

Standard sizes

Type	Structural opening* (ordering size) width x height
HBS 60 C-1	1000 x 2000
	1000 x 2100
	1100 x 2100
	1200 x 2100
	1100 x 2200
	1100 x 2500
	1250 x 2500
HBS 120 C-1	1000 x 2000
	1000 x 2100
	1100 x 2100
	1150 x 2100
	1150 x 2200
	1150 x 2500

Glazing

Type	Window size (figure 1) width x height
HBS 60 C-1	140 x 815
	140 x 815
	140 x 815
	140 x 815
	140 x 815
	140 x 815
	140 x 815
HBS 120 C-1	140 x 815
	140 x 815
	140 x 815
	140 x 815
	140 x 815
	140 x 815

Special glazing

max. 50% of the door area

HBS 120 C-1
max. 0.34 m²

Size range

Structural opening*

HBS 60 C-1

Width 635 - 1260 mm

Height 1755 - 2505 mm

Ceiling-high

Max. height 3505 mm


HBS 120 C-1

Width 635 - 1260 mm

Height 1755 - 2505 mm


max. 2.95 m²

When ordering, please specify LH or RH hinging.



LH hinged

RH hinged

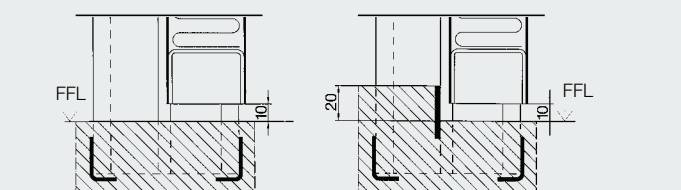

Door floor detail
for flat floor
as standard

Door floor detail
with stepped threshold,
on request or on site