




Dynamic

## Bi-Metal Temperature Gauges

### Size Availability:

inches	mm
3.0"	63
4.0"	100
4.5"	115
6.0"	150

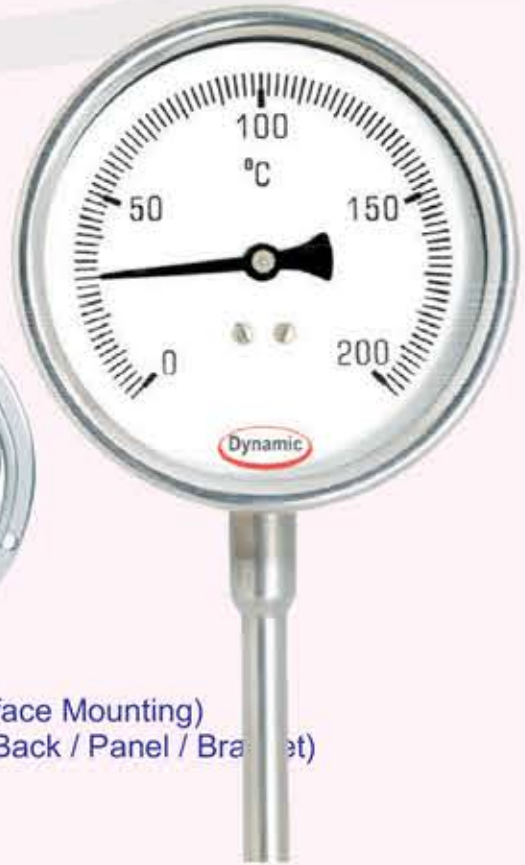

**Connection:** Bottom (Bottom Direct / Surface Mounting)  
Back (Center Back / Lower Back / Panel / Bracket)

### Typical Applications



: These gauges are used in Engineering plant, Machinery. Plant and Apparatus...

## Standard Features

### Nominal Sizes:

63, 100, 115 & 150mm

### Scale Ranges:

Pressure from -30°C to 400°C

### Accuracy Class:

±2.0% of FSD

### Connection:

Bottom/Back (Vertical/Horizontal)  
1/4", 3/8", 1/2" BSP/NPT, Fix/Adjustable

### Threaded Entry:

1/4", 1/2" BSP / NPT

### Location of Stem:

Center Back

### Stem Dia:

6mm, 8mm, 10mm

### Special Versions / Optional / Extras:

Other Pressure connections  
Surface mounting rings  
Panel or Bracket mounting

### Wetted Part Material:

SS 304 / SS 316

### Pointer:

Zero Adjustment

### Sensor:

Bi-Metal

### Liquid Filling:

Yes

### Over-Range Protection:

130% of FSD

### Weather Protection:

IP 56

### Window:

Toughened / Safety Glass

### Case Material:

SS 304

### Dial:

White Aluminium with Black Lettering

Dynamic