

GROUND / EARTH TERMINAL BLOCKS


These Terminal Blocks have specially designed alloy feet which help in achieving very low contact resistance and vibration proof grounding with the DIN rails. They are green / yellow colour coded as per industry standards.

CSCG2.5T



Width (Thickness) x Length		5 x 58 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		38.5 mm / 45.0 mm			
Connection Possibility as per		IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.25 - 2.5 mm ²		22 - 14 AWG	
	Solid	0.25 - 4.0 mm ²		22 - 12 AWG	
	with Ferrule / Lug	0.25 - 2.5 mm ²		22 - 14 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.25 - 1.5 mm ²		22 - 16 AWG	
Wire Stripping Length		15 mm			
Ratings As Per		IEC60947-7-2 IEC 60079-7		UL-1059	CSA22.2-158
Voltage		800 V			
Current		24 A			
Approvals		   			
Insulation Material / Comparative Tracking Index		Polyamide 66 / 1			
Rated Impulse Voltage / Pollution Degree		8 KV / 3			

	Type / Cat. No.	Standard Pack
Terminal Block	CSCG2.5T	100
End Plate 	EPCSC2.5T	50
Mounting Rail (Refer Pg. 136 for details) 	CA701 CA701-15	50 m 50 m
Marking Tags (Refer Pg. 139 for details) 	CA509/K5	100
Screw Driver for actuating the Spring Clamp 	SCS0.5/3 Blade size: 0.5 x 3 mm	10


CSCG4T

6 x 65 mm

45.0 mm / 52.2 mm

IEC	UL - CSA
0.25 - 4.0 mm ²	22 - 12 AWG
0.25 - 6.0 mm ²	22 - 10 AWG
0.25 - 4.0 mm ²	22 - 12 AWG
0.25 - 2.5 mm ²	22 - 14 AWG
15 mm	
IEC60947-7-2 IEC 60079-7	UL-1059 CSA22.2-158
800 V	
32 A	
Polyamide 66 / 1	
8 KV / 3	

Type / Cat. No.	Standard Pack
CSCG4T	100
EPCSC4T	50
CA701	50 m
CA701-15	50 m
CA509/K6	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10


CSCG6T

8 x 72 mm

47.8 mm / 55.2 mm

IEC	UL - CSA
0.25 - 6.0 mm ²	22 - 8 AWG
0.25 - 10.0 mm ²	22 - 6 AWG
0.25 - 6.0 mm ²	22 - 8 AWG
0.25 - 4.0 mm ²	22 - 10 AWG
15 mm	
IEC60947-7-2 IEC 60079-7	UL-1059 CSA22.2-158
800 V	
41 A	
Polyamide 66 / 1	
8 KV / 3	

Type / Cat. No.	Standard Pack
CSCG6T	100
EPCSC6T	50
CA701	50 m
CA701-15	50 m
CA509/K8	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

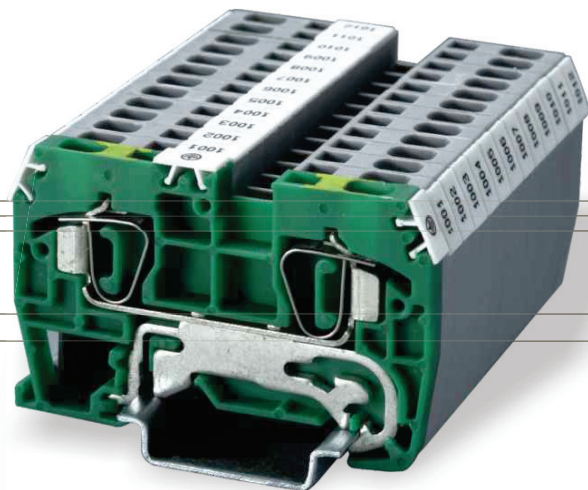
CSCG10T

10 x 75 mm

51.6 mm / 59.0 mm

IEC	UL - CSA
1.5 - 10.0 mm ²	16 - 6 AWG
1.5 - 10.0 mm ²	16 - 6 AWG
1.5 - 6.0 mm ²	16 - 8 AWG
18 mm	
IEC60947-7-2 IEC 60079-7	UL-1059 CSA22.2-158
800 V	
57 A	
Polyamide 66 / 1	
8 KV / 3	


Type / Cat. No.	Standard Pack
CSCG10T	100
EPCSC10T	50
CA701	50 m
CA701-15	50 m
CA509/K10	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10



GROUND / EARTH TERMINAL BLOCKS

These Terminal Blocks have specially designed alloy feet which help in achieving very low contact resistance and vibration proof grounding with the DIN rails. They are green / yellow colour coded as per industry standards.

CSCG16T



Width (Thickness) x Length		12 x 82 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		51.6 mm / 59.0 mm			
Connection Possibility as per		IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	1.5 - 16.0 mm ²		16 - 4 AWG	
	Solid with Ferrule / Lug	1.5 - 16.0 mm ²		16 - 4 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	1.5 - 10.0 mm ²		16 - 8 AWG	
Wire Stripping Length		20 mm			
Ratings As Per		IEC60947-7-2 IEC 60079-7		UL-1059	CSA22.2-158
Voltage		800 V			
Current		76 A			
Approvals		CE			
Insulation Material / Comparative Tracking Index		Polyamide 66 / 1			
Rated Impulse Voltage / Pollution Degree		8 KV / 3			

	Type / Cat. No.	Standard Pack
Terminal Block	CSCG16T	100
End Plate	EPCSC16T	50
Mounting Rail (Refer Pg. 136 for details)	CA701 CA701-15	50 m 50 m
Marking Tags (Refer Pg. 139 for details)	CA509/K12	100
Screw Driver for actuating the Spring Clamp	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10