
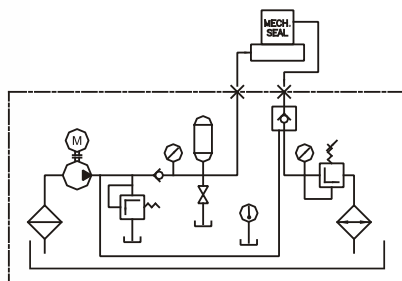


FORCED LUBRICATION SYSTEMS STS-4

API Plan 54

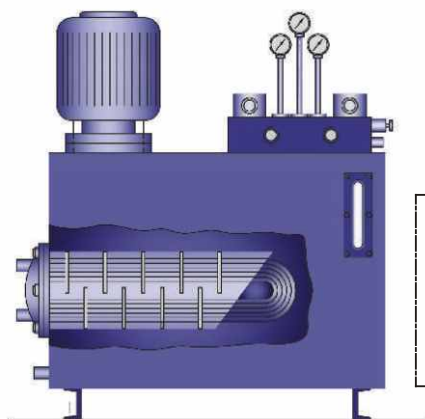

FEATURES :

- Compact, easy to operate
- Automatic pressure hold
- With shell and tube heat exchanger
- Multipoint designs available on request

HI-FAB STS-4 series forced lubrication systems are well designed and easy-to operate buffer fluid systems of highest quality.

The base model type STS-4 is designed for pressure up to 50 bar. Higher versions are also available up to 120 bar pressure and 20 lpm flow. Specially engineered and skid mounted single and multi-point forced lubrication systems are designed on request.



SPECIFICATIONS :

Model	STS-4	STS-41	STS-42
Maximum Pressure	50 bar	75 bar	120 bar
Flow Rate	8 lpm	12 lpm	20 lpm
Reservoir Capacity	100 liters	120 lits.	180 lits.

Accumulator Type	Piston/Bladder
Tank MOC	MS/SS
Valves & Fillings	CS
Optional Instrumentation	Pressure switch / Level switch / RTD
Maximum Return line temp	80°C
Cooler	Shell & Tube type