


Pressure Reducing Valve

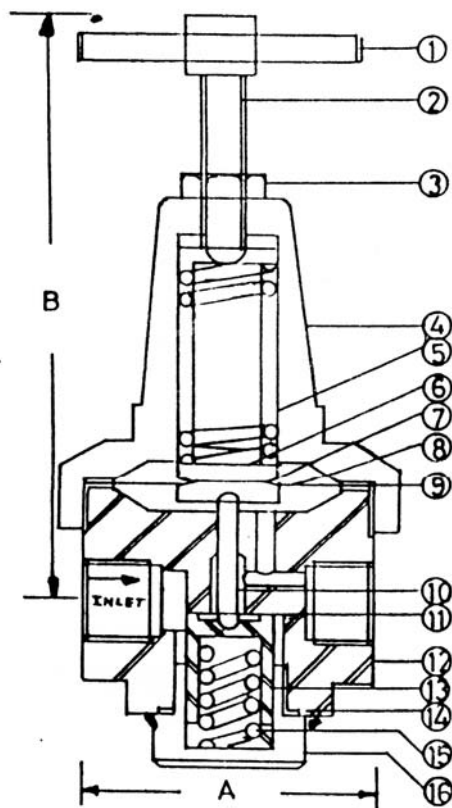

PRESSURE REDUCING VALVE

INLET : 2500 PSIG
OUTLET : 300 PSIG Max
TEMP. : 140° C

DIMENSIONS IN MM		
Size (Inch)	A	B
1/4	53	100
3/8	53	100
1/2	58	110
3/4	63	120
1	75	140

MATERIAL OF CONSTRUCTION

S.No.	Parts	Material
1	Screw, Pin	SS 304
2	Set Screw	SS 304
3	Check Nut	SS 304
4	Top Cover	SS 304 / Brass
5	Spring	CS (Plated)
6	Spring Seat	SS 304
7	Diaphragm Washer	SS 304 / 316
8	Diaphragm	SS 304 / 316 / PTFE
9	Gasket	Asbestos
10	Pin	SS 304 / 316
11	Disc Seat	Soft Seat
12	Body	SS 304 / 316 / Bronze
13	Disc	SS 304 / 316
14	Gasket	PTFE
15	Spring	SS 304 / 316
16	Bottom Bush	SS 304 / 316 / Brass

TECHNICAL DATA REQUIRE FOR SAFETY VALVE

Flow Rate :
 Inlet Pressure :
 Outlet Temperature :
 Operating Temperature :
 Fluid Media :
 Type :
 Connection Intel Size :
 Connection Outlet Size :
 Lock With Locking Bolt :
 Cap over Adjusting Screw :

MATERIAL OF CONSTRUCTION

Body :
 Main Valve :
 Seat :
 Disc. :
 Spring :
 Setting Screw :
 Diaphragm :

Note : Date given are subject to change for products improvements.

Client :
 Ref. No. :
 Drg. No. : PRV - 211



Manufactured by :

KHD VALVES (P) LTD.

H. K. Compound, Opp. Park Devis, Sakinaka, Mumbai - 400 072.

☎ : 2857 4538 / 2857 1068 ● Fax : (91-22) 2857 4538

E-mail : khdvalve@vsnl.com ● Web : www.khdvalve.com