




SLIP ON FLANGES ANSI ASTM B16.5

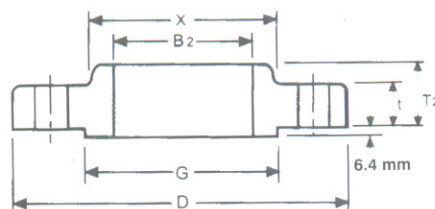

900 LBS

FOR RANGE FROM 1/2" TO 2 1/2" SAME DIMENSIONS AS 1500 LBS

IN
MM

	Outside	thick.	raised	base	dia of	bore	thru.	no. of	dia. of	weight
Pipe	dia		face	of hub	bolt hole		hub	bolt	bolt	Pounds
Size	D	t	G	X	circle	B2	T2	holes	holes	KG
3"	9.5	1.5	5	5	7.5	3.57	2.12	8	1	31.0
	241	38.5	127	127	190.5	90.7	54	8	26	14.1
4"	11.5	1.75	6.19	6.25	9.25	4.57	2.75	8	1.25	53.0
	292	44.5	157.2	158.7	234.9	116.1	70	8	32	24.0
5"	13.75	2	7.31	7.5	11	5.66	3.12	8	1.38	83.0
	349	51	185.7	190.5	279.4	143.7	79	8	35	37.6
6"	15	2.19	8.5	9.25	12.5	6.72	3.38	12	1.25	110.0
	381	56	215.9	234.9	317.5	170.7	86	12	32	49.9
8"	18.5	2.5	10.62	11.75	15.5	8.72	4	12	1.5	170.0
	470	63.5	269.9	298.4	393.7	221.5	102	12	39	77.1
10"	21.5	2.75	12.75	14.5	18.5	10.88	4.25	16	1.5	245.0
	545	70	323.8	368.3	469.9	276.2	108	16	39	111.0
12"	24	3.12	15	16.5	21	12.88	4.62	20	1.5	325.0
	610	79.5	381	419.1	533.4	327	117	20	39	147.0
14"	25.25	3.38	16.25	17.75	22	14.14	5.12	20	1.62	400.0
	640	86	412.8	450.8	558.8	359.2	130	20	42	181.0
16"	27.75	3.5	18.5	20	24.25	16.16	5.25	20	1.75	425.0
	705	89	469.9	508	615.9	410.4	133	20	45	193.0
18"	31	4	21	22.25	27	18.18	6	20	2	600.0
	785	102	533.4	565.1	685.8	461.8	152	20	51	272.0
20"	33.75	4.25	23	24.5	29.5	20.2	6.25	20	2.12	730.0
	855	108	584.2	622.3	749.3	513.1	159	20	54	331.0
24"	41	5.5	27.25	29.5	35.5	24.25	8	20	2.62	1400.0
	1040	140	692.2	749.3	901.7	615.9	203	20	67	635.0