



Indicator

Weighing PCB

PCB Type RTC (7135)

INDEX

Micro Controller	89C52
ADC	7135
Internal Counts	4 ½ Digit. 40,000 (-20,000 TO +20,000)
External Counts	< 30,000
Sampling Rate	'3' Samples per second.
EEPROM	93C46
Display	Encoded - 6 digits 7 Segments - LED.
Amplifier Stage	3

Application

Normal Weighing (Power Up Zero).

Hopper / Tank Weighing (Power Up Actual Weight Display)

Peak / Hold Indication.

Weigh Bridge Indicator

Lit / Kg Facility

Single Display Piece Counting.

Level Controller (Up to 5 level)

Filling Controller (Fine / Coarse / Tolerance Adjustment)


Batching Controller (Multiple Ingredients)

Thermal Printer Interface.

LCD / Real Time Clock / VFD ... Interface Options.

RS232 Computer Interface / RS 485 Interface.

PLC Compatible 0-10VDC or 4-20mA Current O/p.

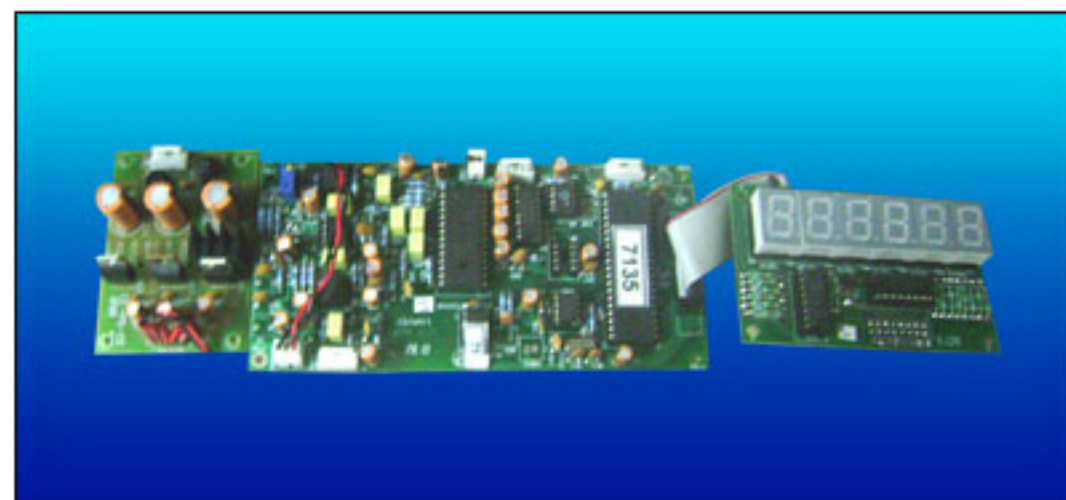

[View Enlarge Image](#)

Perk Mercantile Pvt. Ltd.

D-24 Shalimar Industrial Estate, Matunga Labour Camp, Matunga , Mumbai 400 019. India.

Tel No. : +91-22-2407 6606, 6585 9888 Website : www.concept-electronics.com